

60 monocrystalline 4BB solar cells Photovoltaic Module Saana 300-310 SM4 AAW

Technical Description

- Carefully selected semisquare monocrystalline silicon solar cells for close tolerance
- Solar cells treated for reduced reflection and for efficient conversion of both direct and diffuse light
- Electrical circuit laminated between layers of ethylene vinyl acetate (EVA) for electrical isolation, moisture resistance and UV stability
- Low iron content, tempered glass for mechanical protection and high light transmission
- The light textured surface of the matt glass and anti-reflective coating improves the performance of the module
- The deep texture inside of the glass improves the adhesion of the EVA encapsulant
- Multi-layered polymer backsheets for resistance to abrasion, tears and punctures and dependable electrical insulation
- Rugged and lightweight anodised aluminium frame with mounting, grounding and drainage holes
- Junction box with pre-fitted cables and quick connectors designed for ease and safety
- Wired-in bypass diodes to reduce potential loss of power and damage from partial array shading
- Tested for a wide range of operating conditions (-40°C to +85°C)
- Tested to withstand the highest wind, hail storm and snow load requirements (5400 N/m²)
- Designed to meet or exceed the environmental requirements of IEC61215
- Designed to meet the requirements of IEC61730, including Safety Class II to IEC61140

Naps – photovoltaic systems since 1981

Naps' Solar power experience in all continents and conditions provide the highest level of quality and power in an attractive and dependable package.

High power and efficiency

Naps Saana series of solar modules contain 60 high efficiency, almost black semisquare monocrystalline solar cells. The cells are carefully selected to assure a narrow and positive power range, thus minimising mismatch losses in the system. The high transmission structured glass has a light texture on the front and a deeper texture inside, which improves the adhesion of the EVA encapsulant. This combination of textures also gives improvement to the performance of the solar module compared to smooth glass.

Dependable construction and long life

Featuring the highest standards of construction and materials, Naps Saana solar modules are able to withstand the harshest environments and continue to perform efficiently. Properly installed, these modules have a design life well beyond the power warranty. Limited power warranties are given for 13-26 years. The modules are tested to meet or exceed all relevant international standards and the highest requirements for quality and performance.

For more information please contact us: Naps Solar Estonia Ltd

www.napssolar.ee | Piirimäe 8 Tännassilma küla, 76406 Saku vald Harjumaa, Estonia | Tel. +372 656 6829 | info@napssolar.ee

DS/Saana 300-310 SM4 AAW/EN/3-18

60 monocrystalline 4BB solar cells Photovoltaic Module Saana 300-310 SM4 AAW



Specifications

Performance at STC	300 SM4 AAW	305 SM4 AAW	310 SM4 AAW
Maximum power (W/P _{max})	300	305	310
Maximum power tolerance (W)	+5/-0	+5/-0	+5/-0
Current (typical at max power) (A/I _p)	9.26	9.75	9.76
Voltage (typical at max power) (V/V _p)	32.4	31.3	31.8
Short circuit current (typical) (A/I _{sc})	9.55	10.28	10.22
Open circuit voltage (typical) (V/V _{oc})	38.7	38.6	39.0
Module efficiency (minimum) (%)	18.7	19.1	19.4
Module efficiency (maximum) (%)	20.5	20.8	21.2
Performance at NOCT and 800 W/m ²	300 SM4 AAW	305 SM4 AAW	310 SM4 AAW
Maximum power (W/P _{max})	221.5	223	228
Current (typical at max power) (A/I _p)	7.49	7.84	7.86
Voltage (typical at max power) (V/V _p)	29.6	28.5	29.0
Short circuit current (typical) (A/I _{sc})	7.79	8.37	8.32
Open circuit voltage (typical) (V/V _{oc})	35.6	35.3	35.7

STC = Standard Test Conditions

Cell temperature (°C)	25
Irradiation (W/m ²)	1000
Air Mass	1.5

NOCT = Normal Operating Cell Temperature

Cell temperature (°C)	46
Irradiation (W/m ²)	800
Ambient temperature (°C)	20
Wind speed (m/s)	≤1
Free air access to module rear	

Mechanical Details

Overall length (mm)	1623
Overall width (mm)	986
Area (m ²)	1.600
Thickness at edge (mm)	35
Weight (kg)	18

Construction

Cell type	PERC monocrystalline 4BB
Cells	60
Cell dimensions (mm)	156 x 156 pseudosquare
Cell electrical circuit (series x parallel)	60 x 1
Cell layout (horizontal x vertical)	6 x 10
Glass thickness (mm)	3.2
Junction box type	at least IP65
Bypass diodes factory fitted	3
Cables (4.0 mm ²)	2 x 1 m
Connector type	MC4 or analogue

Protection Class

IEC61730 Application Class A, equivalent to Safety Class II

Maximum System Voltage

Voltage (V)	1000
-------------	------

Overcurrent Protection

Series fuse protection rating (A)	15
Reverse current maximum (A)	15

Mechanical Load

Tested to (N/m ² = Pa)	5400
According to IEC 61215-2 extended test for heavy snow load	

Temperature Coefficients at STC

Open circuit voltage (V/K)	-0,144
Short circuit current (A/K)	0,0068
Maximum power (%/K)	-0,38


Efficiency Reduction from STC

Reduction (approximately) (%)	2
Cell temperature (°C)	25
Irradiance change (W/m ²)	from 1000 to 200
Air Mass	1.5


13 year warranty against defective materials and workmanship.
26 year limited power warranty.

Please confirm current warranty terms before purchase.


Module Dimensions

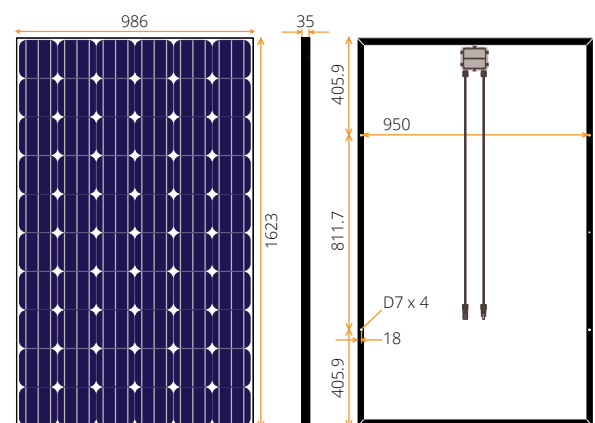

Voltage / Current Dependence on Temperature

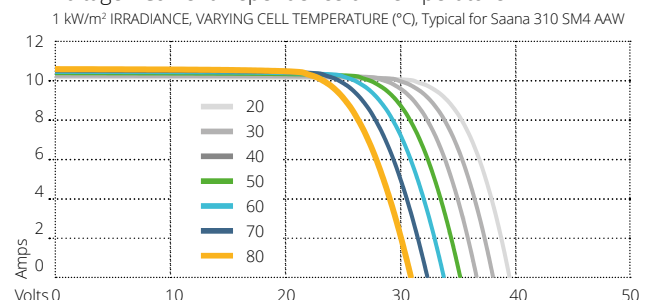

Voltage / Current Dependence on Irradiance

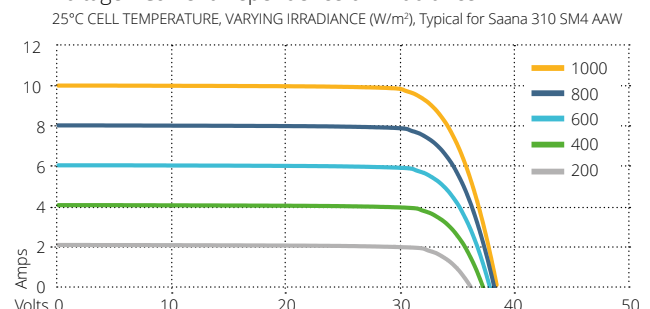

Specifications may change without notice due to Naps' policy of continuous product development.

Please confirm current specification before purchase. All product rights belong exclusively to Naps Solar Estonia Ltd.

For more information please contact us: Naps Solar Estonia Ltd

www.napssolar.ee | Piirimäe 8 Tännassilma küla, 76406 Saku vald Harjumaa, Estonia | Tel. +372 656 6829 | info@napssolar.ee

DS/Saana 300-310 SM4 AAW/EN/3-18